

TUBULAR GEL SOLAR BATTERY

FEATURES



Tubular toughness designed with maintenance free VRLA comfort



Superior performance in deep cycle application




Excellent life in PSOC operation with no acid stratification



Low self-discharge



Meets IS 16270 specifications with latest amendments

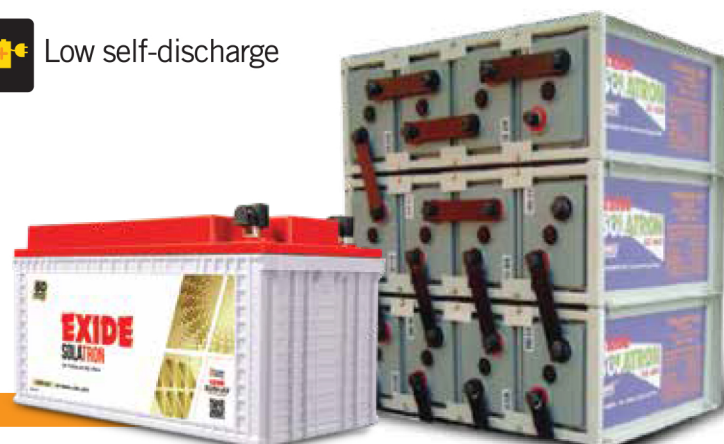

SPECIFICATIONS

SOLATRON (12V)

Model	Nominal Voltage (V)	Capacity @C10 at 27°C (Ah)	Battery Weight with Gel ±5% (kg)	Battery Dimensions		
				Length ±5 mm	Width ±5 mm	Height ±5 mm
6SGL26	12	26	13	197	165	170
6SGL40	12	40	22	354	169	230
6SGL65	12	65	26	354	169	230
6SGL75	12	75	38	531	170	258
6SGL100	12	100	44	531	170	258
6SGL120	12	120	48	531	170	258
6SGL150	12	150	64	533	250	240
6SGL200	12	200	84	428	287	400

SOLATRON (2V)

Model	Nominal Voltage (V)	Capacity @C10 at 27°C (Ah)	Module Dimensions				
			Voltage (v)	Length ±5 mm	Width ±5 mm	Height ±5 mm	Weight ±5% Kg
SG200	2	200	12	406	365	370	91
SG300	2	300	8	585	201	520	102
SG400	2	400	8	585	201	520	113
SG500	2	500	8	717	200	520	149
SG550	2	550	8	717	200	520	149
SG600	2	600	8	585	201	690	158
SG650	2	650	8	825	206	516	172
SG700	2	700	6	552	200	610	137
SG750	2	750	6	552	200	690	155
SG800	2	800	6	552	200	690	155
SG850	2	850	4	386	262	690	125
SG900	2	900	4	386	262	690	125
SG950	2	950	4	386	262	690	133
SG1000	2	1000	4	386	262	690	133